

# IMC-1000M

10/100/1000Base-T to 100/1000Base-SX/LX  
Managed Fiber Converter

# IMC-1000MS

10/100/1000Base-T to 100/1000Base-X  
SFP Managed Fiber Converter



IMC-1000M(S) models are managed Gigabit media converters that support conversion between electrical 10/100/1000Base-T and optical 100/1000Base-X Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. The converters are Web, SNMP or In-Band managed with an easy to use user interface for Operation, Administration, Maintenance & Provisioning, including bandwidth control, speed, VLAN, Diagnostic, storm filter or converter configurations. The network administrator can manage IMC-1000M(S) via standard SNMP manager such as SmartView. It also provide loop-back test and dying gasp, and can be monitored from a centrally located OAM-enabled FRM220-1000MS converter via remote in-band management.

### Features

- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Supports Dual Rate (100/1000) SFP for selectable Fast or Gigabit speed on fiber
- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing
- Wide operating temperature -20~75°C (IMC-1000M(S)-E)
- UL60950-1, CE, FCC, RailWay traffic EN50121-4 certification
- Industrial grade EMS, EMI EN61000-6-2, EN61000-6-4 certification
- MIB counters
- Auto Laser Shutdown (ALS)
- CTC SmartView Management System support
- Web management
- SNMP management
- Supports 16 IEEE 802.1Q Tag VLAN Group
- SNMP alarm trap for power loss and port link down
- Supports in-band management from FRM220 Chassis With FRM220-1000MS
- Remote loop-back test
- Dying gasp (remote power failure detection)

### Specifications

<b>Standard</b>	IEEE802.3 10Base-T IEEE802.3u 100Base-TX , 100Base-FX IEEE802.3ab 1000Base-TX Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-optic IEEE802.3x Flow Control and Back pressure IEEE802.3ah OAM management	<b>LED</b>	Per Unit : Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber LNK/ACT (Green): ON: Connected to network OFF: Not connected to network BLK: Receive /Transmit Data Fiber speed : Yellow : 1000Base-X Green : 100Base-X
<b>Fiber Ports</b>	100Base-X or 1000Base-X set by Web Supports Auto Laser Shutdown (ALS)		RJ-45 port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow)
<b>RJ45 Ports</b>	10/100/1000Base-T		LNK/ACT for RJ45(Green): ON : Connected to network/ OFF: Not connected to network/ BLK: Networking is active
<b>CPU watch dog</b>	Present	<b>Reverse Polarity Protection</b>	Present for power Input
<b>Push Button</b>	Reset, Load default setting	<b>Overload Current Protection</b>	Present
<b>Jumbo Frame</b>	9K bytes	<b>Power Supply</b>	12/24/48VDC (9.6~60VDC) , Redundant power with polarity reverse protect function and removable terminal block Provide DC Power JACK adapter cable for external power adapter
<b>Fiber Parameters</b>	Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: 500M (Multi-mode SX) 20KM (Single-mode) 40KM (Single-mode) (IMC-1000M, IMC-1000M-E) SFP, Distance depend on plug-in Fiber Transceiver (IMC-1000MS, IMC-1000MS-E)	<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1 A @24VDC Relay alarm output for power fail or port link down
<b>Link Lose Forward</b>	TX-Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	<b>Removable Terminal Block</b>	Provide 2 redundant power, alarm relay contact, 7 Pin
<b>Connector</b>	Fiber: SC (Multi-mode, 500M), SC (Single-mode, 20KM, 40KM) (IMC-1000M, IMC-1000M-E) SFP Slot (IMC-1000MS, IMC-1000MS-E) RJ-45: CAT 5e (10/100/1000Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Supports	<b>Power Consumption</b>	4.8 W
		<b>Operating Humidity</b>	5% ~ 95% (Non-condensing )
		<b>Operating Temperature</b>	-10° ~ 60°C (IMC-1000M, IMC-1000MS) -20 ~ 75°C (IMC-1000M-E, IMC-1000MS-E)
		<b>Storage Temperature</b>	-40 ~ 85°C
		<b>Housing</b>	Rugged Metal, IP30 Protection
		<b>Dimensions</b>	106 x 38.6 x 142 mm (D x W x H)
		<b>Weight</b>	0.63kg (IMC-1000M, IMC-1000M-E) 0.62kg (IMC-1000MS, IMC-1000MS-E)
		<b>Installation</b>	DIN Rail mounting or wall mounting

## Specifications

<b>EMI</b>	FCC Part 15 Subpart B Class A, CE EN 55022 Class A	<b>Safety</b>	UL60950-1
<b>EMS</b>	EN 61000-6-2 – Immunity for Industrial environment	<b>Railway Traffic</b>	EN 50121-4
	EN61000-4-2 (ESD) Level 3, Criteria B	<b>Shock</b>	IEC 60068-2-27
	EN61000-4-3 (RS) Level 3, Criteria A	<b>Freefall</b>	IEC 60068-2-32
	EN61000-4-4 (EFT) Level 3, Criteria A	<b>Vibration</b>	IEC 60068-2-6
	EN61000-4-5 (Surge) Level 3, Criteria B	<b>MTBF</b>	544,905 hrs (IMC-1000MS, IMC-1000MS-E) (MIL-HDBK-217) 559,059 hrs (IMC-1000MS, IMC-1000MS-E) (MIL-HDBK-217)
	EN61000-4-6 (CS) Level 3, Criteria A	<b>Warranty</b>	5 years
	EN61000-4-8 (Magnetic Field) Field strength: 300A/m, Criteria A		

## Software Specification

### Stand-alone or Web Mode

<b>Management</b>	Ingress/Egress bandwidth control with 64K granularity Web management, Firmware upgrade via Web Supports SNMP, MIB for management Supports DHCP client for automatic IP configuration Supports 802.1Q tag VLAN, 16 Tag VLAN group, MIB counters display
<b>Configuration</b>	IP configuration, password setting, converter configuration, port configuration, MIB counter, SNMP configuration, VLAN group configuration, alarm configuration
<b>Diagnostic &amp; Monitor</b>	Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter SNMP alarm trap for power loss and port link Up/Down

### In-Band Remote mode

<b>Management</b>	Supports in-band management from FRM220 Chassis With FRM220-1000MS card Ingress/Egress bandwidth control with 64K granularity
<b>Configuration</b>	IP configuration, converter configuration, port configuration, MIB counter, VLAN group configuration, alarm configuration
<b>Diagnostic &amp; Monitor</b>	Remote loop-back test Dying gasp (remote power failure detection) Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter

## Application

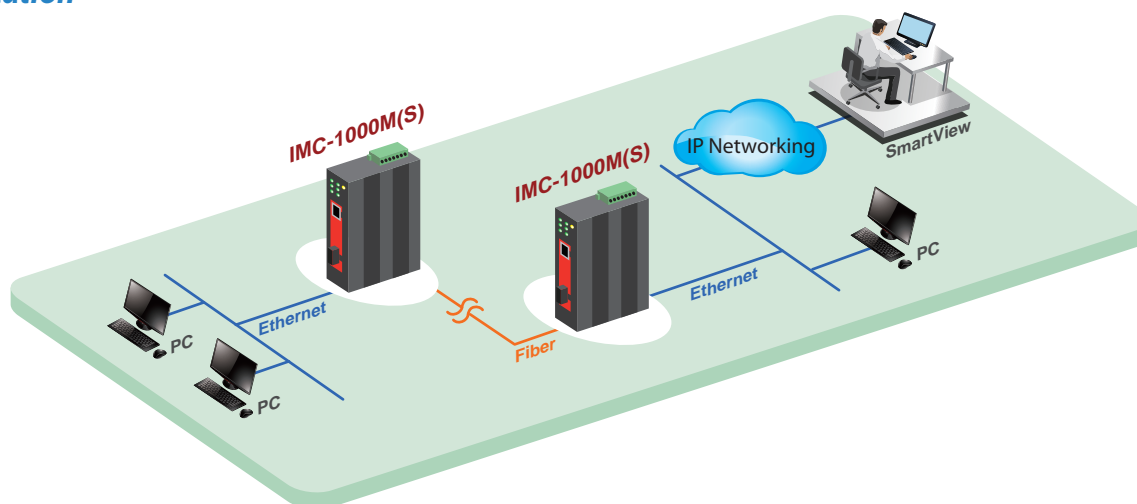


Figure : IMC-1000(S) Application in Stand-alone SNMP management by CTC SmartView

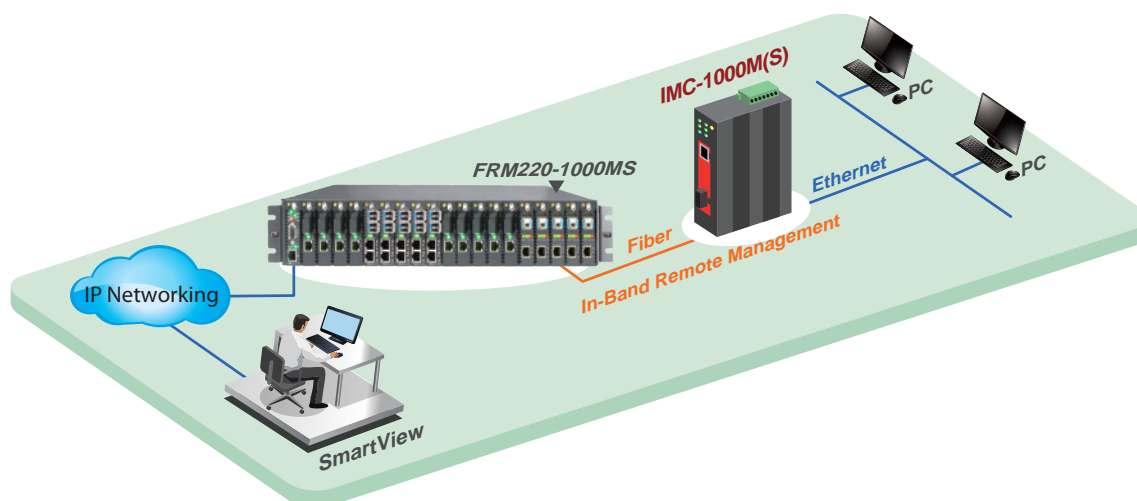


Figure : IMC-1000(S) Application in Remote, In-Band management

## Application


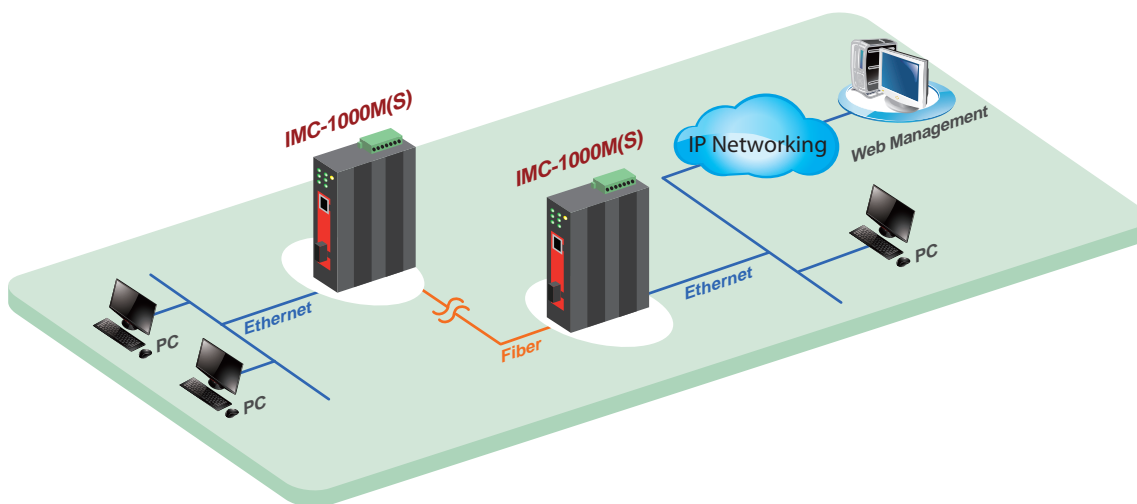


Figure : IMC-1000M(S), Application in Web Management

## Dimensions

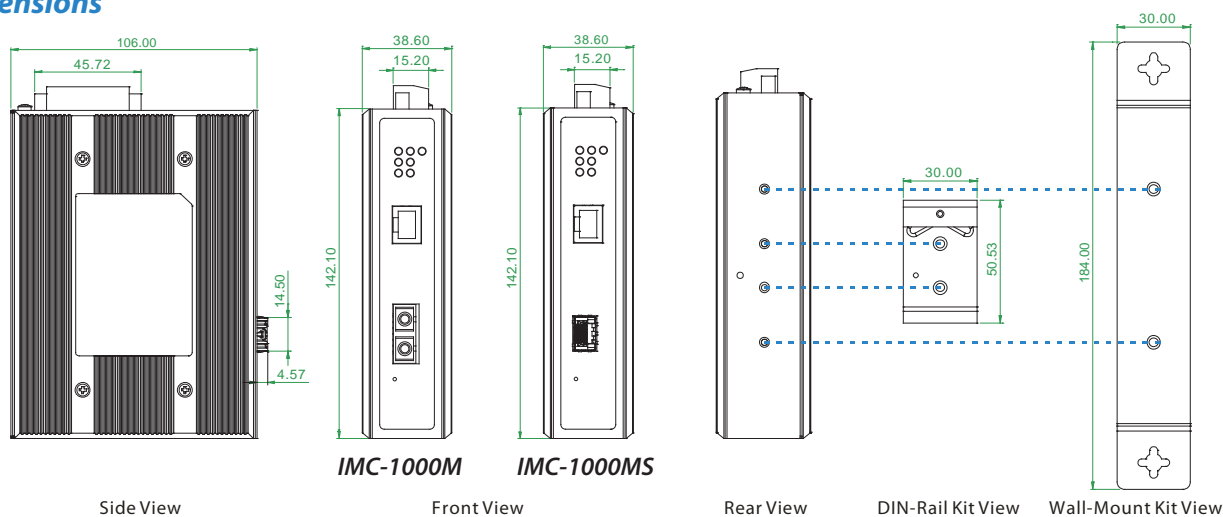


## Ordering Information

Model Name	Description
IMC-1000M	Industrial Managed 10/100/1000Base-T to 1000Base-SX/LX/ FX Fiber Converter (-10 ~ 60°C)
IMC-1000M-E	Industrial Managed 10/100/1000Base-T to 1000Base-SX/LX/ FX Fiber Converter (-20 ~ 75°C)
IMC-1000MS	Industrial Managed 10/100/1000Base-T to 1000Base-X SFP Fiber Converter (-10 ~ 60°C)
IMC-1000MS-E	Industrial Managed 10/100/1000Base-T to 1000Base-X SFP Fiber Converter (-20 ~ 75°C)

Connector Type	Connectivity Distance
SC	001:500M (M/M) 002 : 2km (M/M) 020:20km (S/M) 040:40km (S/M)
(IMC-1000M, IMC-1000M-E only)	020A: WDM 20km A type (TX:1310nm) 020B: WDM 20km B type (TX: 1550nm)

### Accessories

DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C
SFP Transceiver	Compatible, Reliable, 5-year Warranty

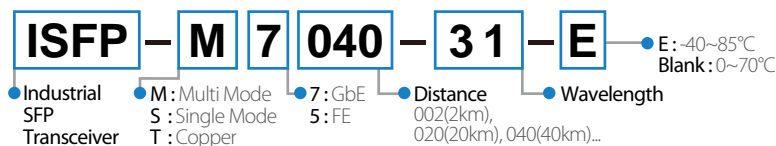

Example: **IMC - 1000M - E - SC002**

Temperature Connector Connectivity  
Type Type Distance